
User's Manual for Motorised Projector Lift

(F

Product Description:

Motorised projector lift(Below simply "lift" for short) adopt double scissor type structure and the theory of double straps lifting. Featured with elegant appearance design, safety and dependable function, accurate positioning, low noise, easy-installation, etc. Applicable widely to projection, lighting & audio projects.

1. Product model/Specification/Size Unit: mm

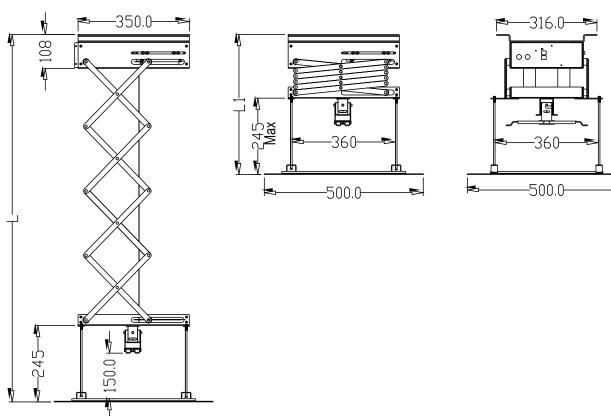

Specifications	SX080	SX100	SX150	SX200
Size of lift Fold up (mm)	350x316x420(L1)	350X316X440 (L1)	350X316X480 (L1)	350X316X530 (L1)
Size of lift Extended (mm)	350x316x1290 (L)	350X316X1525 (L)	350X316X1995 (L)	350X316X2700(L)
Minimum dist for ceiling and false ceiling(mm)	440mm	460mm	500mm	550mm
Bottom Plate size(mm)	500x500	500x500	500x500	500x500
Loading Capacity	15Kg(Max)	15Kg(Max)	15Kg(Max)	15Kg(Max)
Rated voltage	220-240V	220-240V	220-240V	220-240V
Max Power consumption	60W	60W	60W	60W
Tilt angle	±22.5°	±22.5°	±22.5°	±22.5°
Roll angle	±15°	±15°	±15°	±15°
Motor	SYNCHRONOUS MOTOR	SYNCHRONOUS MOTOR	SYNCHRONOUS MOTOR	SYNCHRONOUS MOTOR
	RF/Central	RF/Central	RF/Central	RF/Central
Control Methods	Control/12V	Control/12V	Control/12V	Control/12V
	Trigger/panel	Trigger/panel	Trigger/panel	Trigger/panel
Limit Adjustment	By Limit Switch	By Limit Switch	By Limit Switch	By Limit Switch
Color	White	White	White	White
Packing Dimension(mm)	530x530x260	530x530x260	530x530x300	530x530x350
Net Weight(Kgs)	18	18. 5	19. 5	21
Gross Weight(Kgs)	19. 5	20	21	22. 5



Installation Environment Required:

- 1. The lift shall work indoor where there is no any corrosive or combustible substance; and should not approach the steam pipe, hot air pipe, or other central heating equipment.
- 2. Voltage: 220-240V, Power: 50W



Installation:

- 1. The distance between ceiling and false ceiling must bigger than the height of fold up size(L1) of the lift..
- 2. Suggest open dimension on false ceiling for the lift is :450mmX450mm
- 3. Suggest open a 400mmX400mm maintenance window on the false ceiling, 100mm~200mm away from the back side of the lift.
- 4. Drill four holes correctly on the ceiling for the installation plate, considering the direction of the installed projector, then mount the installation plate of the lift on the ceiling firmly with four Ø8mm explosion screws through the four Ø10mm screw holes.
- 5, The explosion screws must installed in concrete or masonry or more strong ceiling. The explosion screws must drill deeply into the ceiling to keep adequate bearing capability.



- 1. The explosion screws must fixed on the ceiling firmly.
- 2. While the lift working, people must not stand below the lift, or locate anything at the level where it can reach.
- 3. Make sure the gravity of the projector in the center of the lift, or the center of the gravity will shift or loss balance; And the lift can't work overloaded.
- 4. Please do not put your hands or anything to the cross-scissor parts while the lift working to avoid injury.;





Trouble shootings:

Please let technicians check below items, if still can't solve the problems, please contact the resellers.

- Please check if the connection of the power cord is correct.
- Please check if the strip is entangled or loose.
- Please check if the E-Stop button is pressed down.
- 4. Please check if the limit switch is loose or shift.



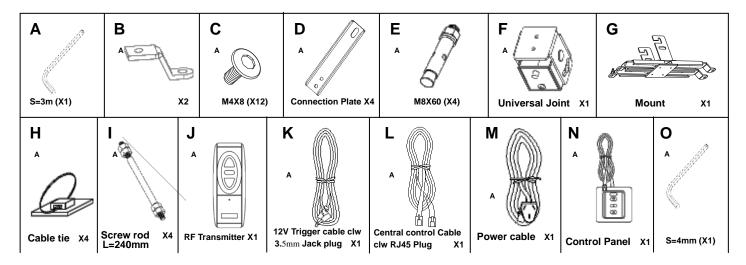

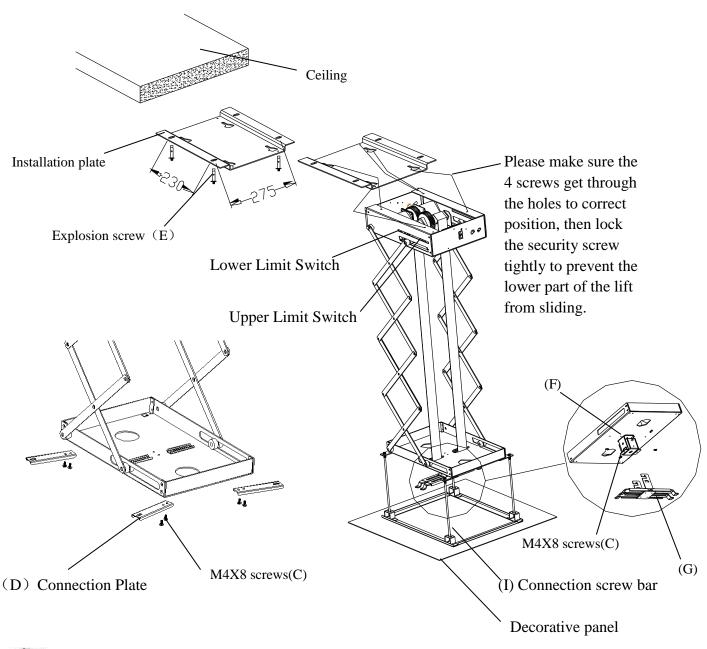




1. The manual for remote

2. The adjustment of upper and lower limit

Lower limit: Move leftwards to shorten move rightwards to enlarge the running distance.

3. Input and out put function

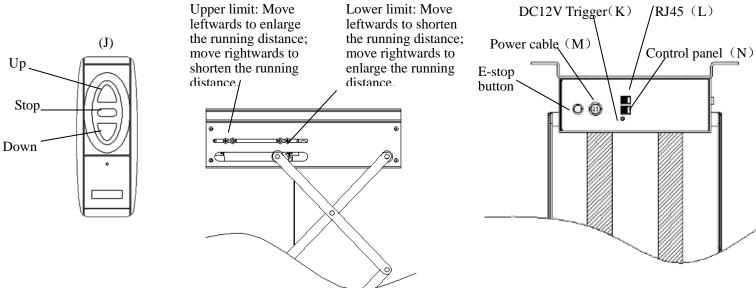

Central Control Encode Table.

No.	Name	Encoding
1	Serial port setup	2400,n,8,1
2	Up	0xFF 0xAA 0xEE 0xEE 0xDD
3	Stop	0xFF 0xAA 0xEE 0xEE 0xCC
4	Down	0xFF 0xAA 0xEE 0xEE 0xEE

