


LCD Lift

Bomb bay doors and a slim cross-section distinguish the LCD LIFT. Most popular LCD/DLP/LCOS projectors fit comfortably inside this unit, which is available in two sizes—MODEL A and MODEL B. Bomb bay style closure doors are standard.

Plenum housing of aluminum, with closure doors finished in white. Contains internal switched duplex receptacle, 115V AC, which is powered when the unit is fully down. The LCD LIFT contains an innovative current sensor that delays closing of the unit until the projector lamp has shut off. Lifting capacity 65 lbs.

System Options

- **Ceiling Closure Panel**—Universal steel ceiling closure in a white baked enamel finish or recessed to accept ceiling tile.
- **Ceiling Access Door**—A 2' x 2' hinged door to access lift above a finished ceiling for cleaning, maintenance or repairs without having to damage the ceiling. Available with a white painted finish or recessed to accept ceiling tile.
- **Aero Low Profile Mount**—For projectors weighing less than 26 pounds. Details on page 30.
- **Factory installed cables**—for RGBHV, Video and Control.
- **Control Options**—Operated by one 115V rocker switch. For more options, refer to page 26.

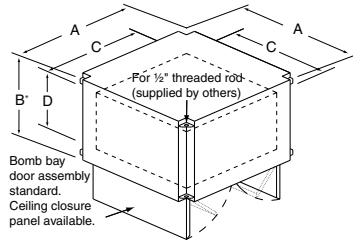

	Model A	Model B
A	24"	29"
B*	17 3/4"	22 3/4"
C	18"	23"
D	11"	16"

*Ceiling closure panel adds 5/8" to dimension B.



LCD Lift Model A with standard bomb bay closure located at Manitowoc Beverage Equipment, Sellersburg, IN. Installation by ISSG and photography by Kenneth Hayden, both of Louisville, KY.